



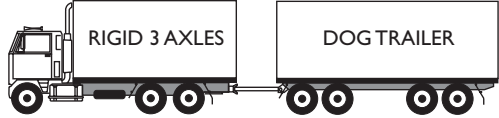

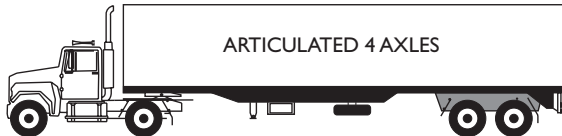
Mass – limits and break points

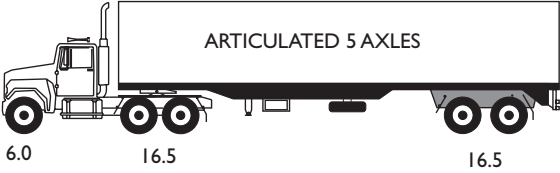
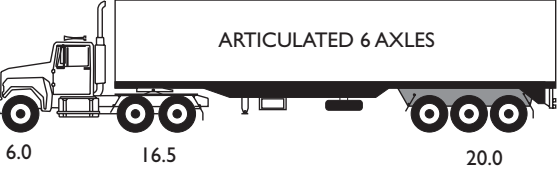
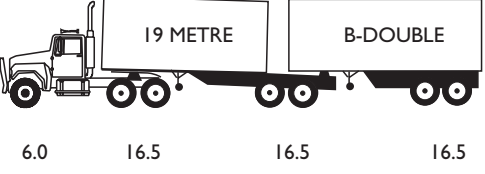
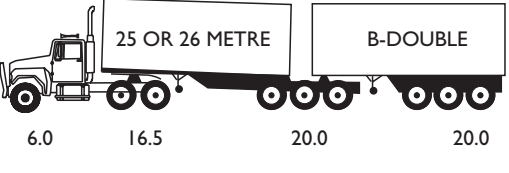
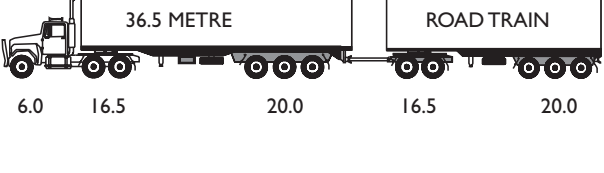

Compliance and enforcement in the transport industry

JANUARY 2006

This table is a summary of the limits and breakpoints for most axle types and vehicle GVMs.

PLEASE NOTE: This symbol \geq represents greater than or equal to.

VEHICLE TYPES	LEGAL AXLE WEIGHT LIMIT	RISK CATEGORY BREAK POINTS		
		MINOR	SUBSTANTIAL	SEVERE
 <p>RIGID 2 AXLES</p> <p>6.0 9.0</p> <p>GROSS 15.0</p>	6.0	Up to 6.2	≥ 6.3	≥ 7.2
	9.0	Up to 9.4	≥ 9.5	≥ 10.8
	Gross 15.0	Up to 15.7	≥ 15.8	≥ 18.0
 <p>RIGID 3 AXLES</p> <p>6.0 16.5</p> <p>GROSS 22.5</p>	6.0	Up to 6.2	≥ 6.3	≥ 7.2
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	Gross 22.5	Up to 23.6	≥ 23.7	≥ 27.0
 <p>RIGID 3 AXLES DOG TRAILER</p> <p>GROSS 42.5 STATUTORY LIMIT 50.0 PERMIT/NOTICE</p>	Gross 42.5	Up to 44.6	≥ 44.7	≥ 51.0
	Gross 50	Up to 52.4	≥ 52.5	≥ 60.0
 <p>RIGID 4 AXLES</p> <p>10.0 or 11.0 16.5</p> <p>GROSS 27.5</p>	Gross 26.5	Up to 27.8	≥ 27.9	≥ 31.8
	Gross 27.5	Up 28.8	≥ 28.9	≥ 33.0
 <p>ARTICULATED 4 AXLES</p> <p>6.0 9.0 16.5</p> <p>GROSS 31.5</p>	6.0	Up to 6.2	≥ 6.3	≥ 7.2
	9.0	Up to 9.4	≥ 9.5	≥ 10.8
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	Gross 31.5	Up to 33.0	≥ 33.1	≥ 37.8

VEHICLE TYPES	LEGAL AXLE WEIGHT LIMIT	RISK CATEGORY BREAK POINTS		
		MINOR	SUBSTANTIAL	SEVERE
 <p>ARTICULATED 5 AXLES</p> <p>6.0 16.5 16.5</p> <p>GROSS 39.0</p>	6.0	Up to 6.2	≥ 6.3	≥ 7.2
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	Gross 39.0	Up to 40.9	≥ 41.0	≥ 46.8
 <p>ARTICULATED 6 AXLES</p> <p>6.0 16.5 20.0</p> <p>GROSS 42.5</p>	6.0	Up to 6.2	≥ 6.3	≥ 7.2
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	20.0	Up to 20.9	≥ 21.0	≥ 24.0
	Gross 42.5	Up to 44.6	≥ 44.7	≥ 51.0
 <p>19 METRE B-DOUBLE</p> <p>6.0 16.5 16.5 16.5</p> <p>GROSS 50.0 GENERAL ACCESS 55.5 APPROVED ROUTES</p>	6.0	Up to 6.2	≥ 6.3	≥ 7.2
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	50.0	Up to 52.4	≥ 52.5	≥ 60.0
	55.5	Up to 58.2	≥ 58.3	≥ 66.6
 <p>25 OR 26 METRE B-DOUBLE</p> <p>6.0 16.5 20.0 20.0</p> <p>GROSS 62.5</p>	6.0	Up to 6.2	≥ 6.3	≥ 7.2
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	20.0	Up to 20.9	≥ 21.0	≥ 24.0
	20.0	Up to 20.9	≥ 21.0	≥ 24.0
	Gross 62.5	Up to 65.6	≥ 65.7	≥ 75.0
 <p>36.5 METRE ROAD TRAIN</p> <p>6.0 16.5 20.0 16.5 20.0</p> <p>GROSS 79.0</p>	6.0	Up to 6.2	≥ 6.3	≥ 7.2
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	20.0	Up to 20.9	≥ 21.0	≥ 24.0
	16.5	Up to 17.3	≥ 17.4	≥ 19.8
	20.0	Up to 20.9	≥ 21.0	≥ 24.0
	Gross 79.0	Up to 82.9	≥ 83.0	≥ 94.8
 <p>PIG TRAILER 3 AXLES</p> <p>18.0 GROSS 18.0</p>	Gross 18.0	Up to 18.8	≥ 18.9	≥ 21.6



Where can I find out more information about C&E?



Visit the RTA website www.rta.nsw.gov.au

Visit the National Transport Commission website www.ntc.gov.au

Email the RTA on compliance_and_enforcement@rta.nsw.gov.au